


CABL SZ-CAT6 FTP CU

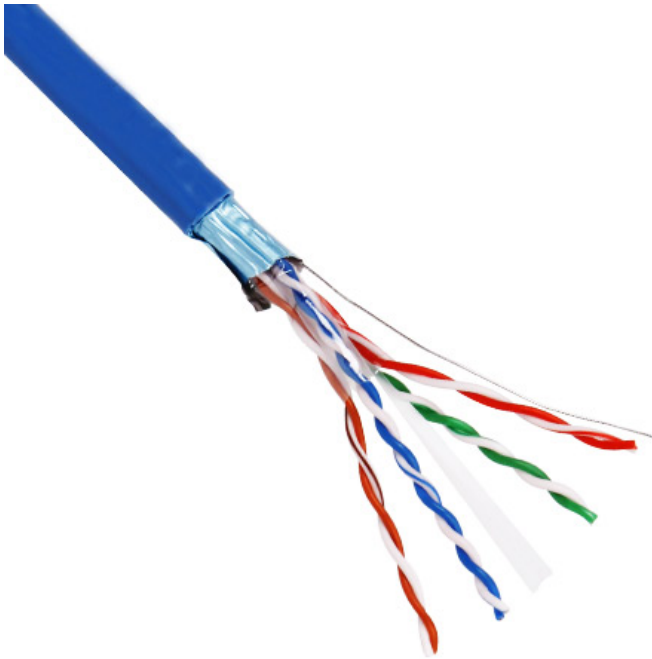

CAT6 | FTP | CU | 7.2MM | 305M

Manufacturer: [MPSAT](#)

Description

Description:
Unshielded copper cable, 4 pairs, category 6, solid

Conductor:

Diameter: 0.565 ± 0.008 mm (23 AWG)

Insulation:

Insulated conductor diameter: 1.1 ± 0.05 mm

Thickness: 0.26 ± 0.02 mm

Material: Polyethylene

Inner Layer

Direction: S
Pitch: 90 ± 5 mm

Cross

Material: Polyethylene

Diameter: $4.4 \times 4.4 \pm 0.1$ mm

Shielding1

Material: Mylar Spirally Wrapped

Coverage: 100% coverage with 25% overlapping

Drain Wire

Material: Aluminum metal

Construction: 1 / 0.40 ± 0.008 mm or $7/0.12 \pm 0.008$ mm

Shielding2

Material: Aluminum Mylar Spirally Wrapped

Coverage: 100% coverage with 25% overlapping

Rip cord

Material: Nylon

Jacket:

Material: PVC

thickness: 0.55 mm (Min. Thickness: 0.48mm)

diameter: 7.2 ± 0.20 mm