


TAP DER620

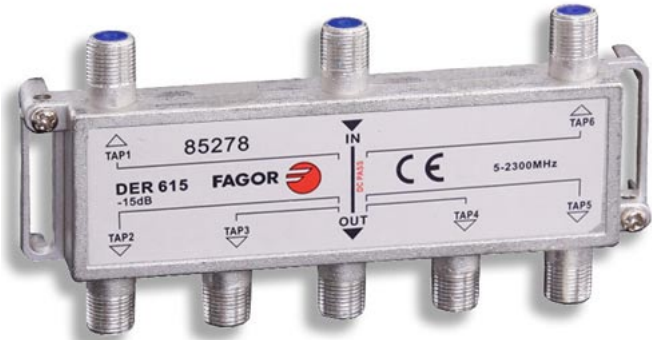

1st IF SAT tap-off, 6 outputs. Tap loss -20dB

Manufacturer: [Fagor](#)

Description

| MODEL                      |    | TAP-OFFS       |         |         |         |                |         |         |         |         |         |  |
|----------------------------|----|----------------|---------|---------|---------|----------------|---------|---------|---------|---------|---------|--|
| Reference                  |    | DER 410        | DER 415 | DER 420 | DER 425 | DER 610        | DER 620 | DER 625 | DER 615 | DER 620 | DER 625 |  |
| Nr. of outputs             |    | 85274          | 85275   | 85276   | 85277   | 85278          | 85279   | 85280   | 85281   | 85282   | 85283   |  |
| Covered band               |    | 4              |         |         |         | 6              |         |         |         | 8       |         |  |
| Tap Loss<br>(a 0.5 dB)     |    | MHz            |         |         |         | 5 + 2300       |         |         |         |         |         |  |
| 5 - 2300 MHz               | dB | 10             | 15      | 20      | 25      | 15             | 20      | 25      | 15      | 20      | 25      |  |
| 5 - 47 MHz                 | dB | 4              | 2       | 1       | 1       | 3,5            | 1,5     | 0,5     | 3,5     | 1,5     | 1       |  |
| Through loss               | dB | 4              | 2,5     | 1       | 1       | 4              | 2       | 1,5     | 4       | 2       | 1       |  |
| 960 - 2150 MHz             | dB | 5              | 4       | 2       | 2       | 3              | 4,5     | 3,5     | 3       | 3,5     | 2       |  |
| 2150 - 2300 MHz            | dB | 5,5            | 4,5     | 3       | 2       | 5,5            | 5       | 5       | 5,5     | 3,7     | 2,5     |  |
| 5 - 47 MHz                 | dB | 25             | 30      | 35      | 40      | 25             | 30      | 30      | 25      | 30      | 30      |  |
| Directional                |    | 77             | 58      | 50      | 35      | 22             | 25      | 20      | 22      | 25      | 30      |  |
| 960 - 2150 MHz             | dB | 25             | 25      | 25      | 25      | 22             | 25      | 25      | 22      | 25      | 25      |  |
| 2150 - 2300 MHz            | dB | 25             | 25      | 25      | 25      | 22             | 25      | 25      | 22      | 25      | 25      |  |
| 5 - 47 MHz                 | dB | 23             | 23      | 23      | 23      | 21             | 24      | 24      | 22      | 24      | 24      |  |
| Output                     |    | 22             | 22      | 22      | 22      | 22             | 20      | 20      | 22      | 22      | 22      |  |
| 47 - 862 MHz               | dB | 21             | 22      | 22      | 22      | 22             | 22      | 22      | 22      | 22      | 22      |  |
| 960 - 2150 MHz             | dB | 21             | 21      | 21      | 21      | 18             | 18      | 16      | 18      | 18      | 18      |  |
| 2150 - 2300 MHz            | dB |                |         |         |         | 12             |         |         |         |         |         |  |
| Return losses              | dB |                |         |         |         | 10             |         |         |         |         |         |  |
| 960 - 2150 MHz             | dB |                |         |         |         | 10             |         |         |         |         |         |  |
| Min. screening factor      | dB |                |         |         |         | 65             |         |         |         |         |         |  |
| Packing dimensions (10 u.) | mm | 180 x 105 x 65 |         |         |         | 205 x 125 x 67 |         |         |         |         |         |  |
| Weight (10 u.)             | Kg | 0,70           |         |         |         | 1,10           |         |         |         |         |         |  |